


SRTD5

RTD Assembly With Transition Joint

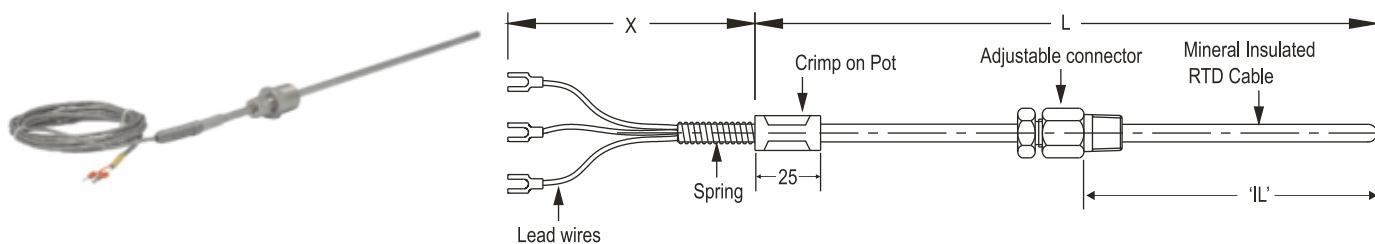

HOW TO ORDER

Code	No of Element
1	Simplex
2	Duplex

Code	Element
Pt -100	Pt-100 RTD
Pt- 500	Pt- 500 RTD
Pt - 1000	Pt - 1000 RTD
Cu - 53	Cu - 53

Code	Range
FLM	-200°C till 449°C
CMC	450°C till 600°C

Code	Accuracy
A	Class 'A' Tolerance as per IEC - 751
B	Class 'B' Tolerance as per IEC - 751

Code	Wire Configuration
2W	2 Wire System
3W	3 Wire System
4W	4 Wire System

Code	Sheath Diameter
3	3.0 mm
4	4.0 mm
5	5.0 mm
6	6.0 mm
8	8.0 mm
10	10.0 mm
Consult factory for other diameter.	

Code	Sheath Material
304	SS 304 (Standard)
316	SS 316

Code	Immersion Length 'IL' / Element Length 'L' mm
	Specify in mm.

Code	Lead Wire Length "X" mm
	Specify in mm.

SPECIAL FEATURES:

- Mineral insulation.
- RTD with adjustable process connection for adjustable insertion length.
- Mineral insulation enables flexibility and Durability.
- Reference standard :- **IEC - 751 / DIN 43760**

APPLICATIONS:

- This design is used in General industry for temperature measurement.

STANDARD PRODUCT DETAILS

No of element	- Simplex
Element type	- Pt-100 RTD
Range	- -200°C till 449°C
Accuracy	- Class 'B' Tolerance as per IEC - 751
Wire Configuration	- 3 Wire System
Sheath Diameter	- 6.0 mm
Sheath Material	- SS 304 / SS 316
Immersion Length 'IL' /	
Element Length 'L' mm	- L = 300 mm
Lead Wire Length "X" mm	- 3000 mm
Lead Wire Type	- PTFE / PTFE / SS braided lead wire
Process Connection	- 1/2"NPT(M) adj. connector in SS 304
Option Description	- SS Tag Plate

Code	Lead Wire Type
1	PTFE insulated lead wires.
2	PTFE / PTFE insulated lead wires.
3	PTFE / PTFE / SS braided lead wires.

Code	Process Connection
A	1/2"NPT(M) adj. connector in SS 304
B	1/2"NPT(F) adj. connector in SS 304
C	1/2" BSP(M) adj. connector in SS 304
D	1/2" BSP(F) adj. connector in SS 304
	Other, please specify.

Code	Option Description
PW	Factory Calibration Certificate
SX	SS Tag Plate

Note :

1. When selecting option "PW", please also specify measuring temperature range. (For e.g. 0/300°C)