

S3MV


3 Valve Manifold
Remote mount (Pipe to Pipe)

With threaded vertical port inlets and outlets. The isolating bonnets are positioned on the left and right hand side and the equalizing bonnet is positioned on the front. This manifold is specially designed as miniature valve to be remote mounted.



Standard Connection

Product	Process side	Instrument side
S3MV	1/2" NPT female	1/2" NPT female

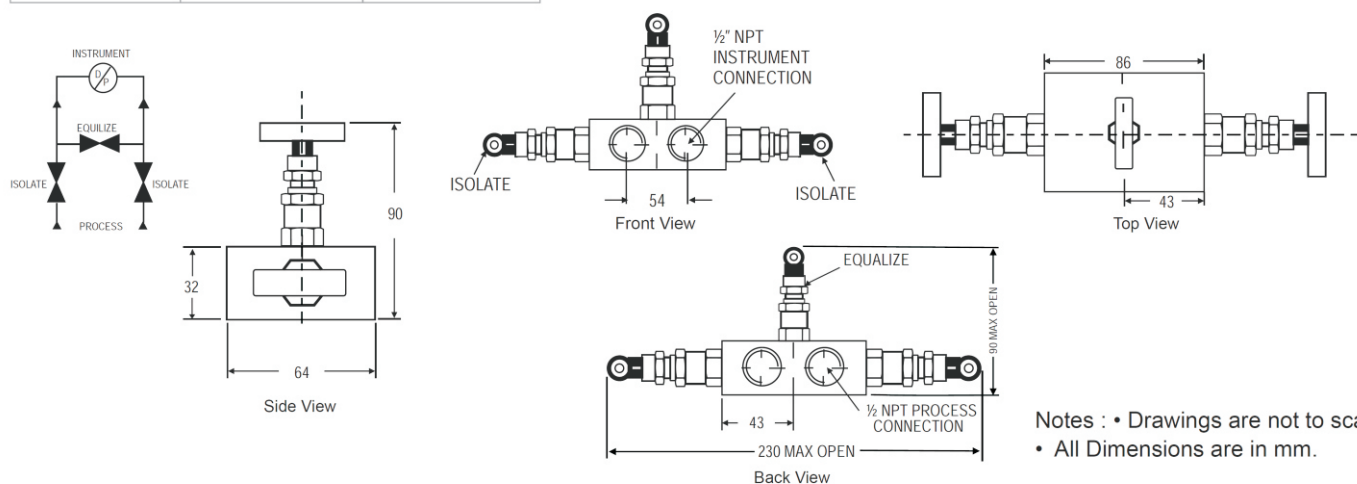

Notes : • Drawings are not to scale.
• All Dimensions are in mm.

Specification Standard Version

Body material	:	AISI 316 Stainless Steel
Stem	:	AISI 316 SS
Valve Assembly	:	AISI 316 SS
'T' bar Handle	:	AISI 304 SS
Maximum Working Pressure	:	6000 PSI
Maximum Working Temperature	:	240°C
Packing	:	PTFE
Type of Stem	:	With Conical Metal Tip
Drain Port	:	1/4" NPT (F) With AISI 316 SS Male Plug
Bracket Mounting Hole	:	2 Hole

Notes : • Drawings are not to scale. • All Dimensions are in mm. • Drawings & dimensions are change without prior to notice