



SHREEJI

Helping World to Measure....

S5MV

3 Valve Manifold

Remote mount (Pipe to Pipe)




Coplanar mounting Five Valve Manifold with drain plugs. This manifold has two isolating valves, one equalizer valve & two vent Valve. When assembled to transmitter has the advantage of compact size with easy for operation in minimum space. The direct mounting facility to the base of the differential pressure transmitter result in less leakage points and more accurate measurements.

This model mainly suitable for transmitters.

The manifold dimensions illustrated for standard 54 mm instrument are also available for other center on request.

Standard Connection

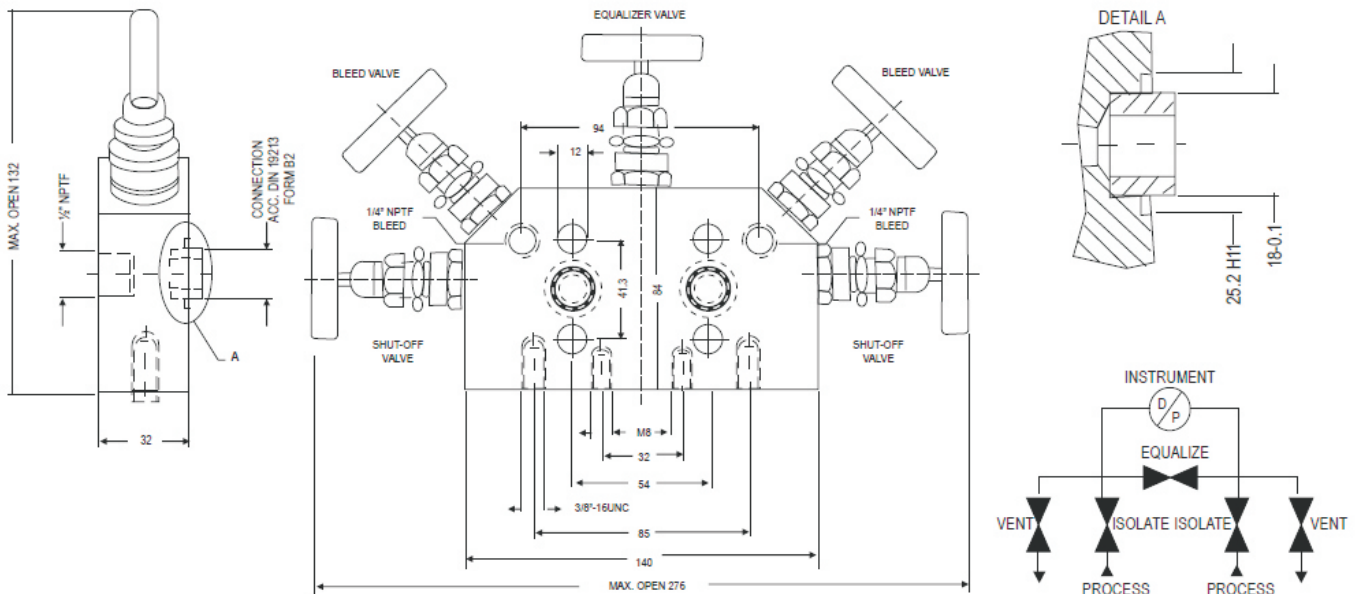

Notes : • Drawings are not to scale. • All Dimensions are in mm.

For Further details please contact factory.

Specification Standard Version

Body material	:	AISI 316 Stainless Steel
Stem	:	AISI 316 SS
Valve Assembly	:	AISI 316 SS
'T' bar Handle	:	AISI 304 SS
Maximum Working Pressure	:	6000 PSI
Maximum Working Temperature	:	240°C
Packing	:	PTFE
Type of Stem	:	With Conical Metal Tip

Notes : • Drawings are not to scale. • All Dimensions are in mm. • Drawings & dimensions are change without prior to notice